


ROOFS

RESISTO

The HIGH PERFORMANCE LASTOBOND PRO HT-N

is a 40-mil-thick, self-adhesive membrane composed of elastomeric bitumen and a trilaminate woven polyethylene. This nonslip, flexible, self-sealing membrane can be used in outdoor temperatures ranging from -40 °F to 200 °F (-40 °C to 93 °C). It has an easy-to-remove silicone-treated release sheet (split-back) on the self-adhesive side.

LASTOBOND PRO HT-N is a high performance roof underlayment used for any type of roof covering.

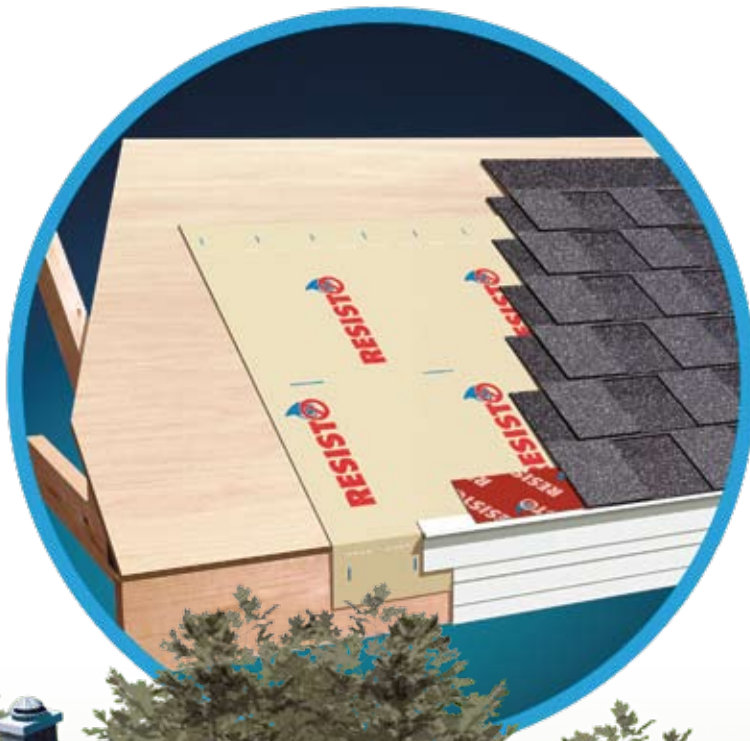

LASTOBOND PRO HT-N EAVES PROTECTION SHEET

HIGH PERFORMANCE

SELF-ADHESIVE ELASTOMERIC



- Anti-slip surface
- Self-sealing around nails and screws
- Clean, fast and easy installation
- UV resistant (90 days exposure)
- High tensile strength
- Effective and hard-wearing
- Requires no special tools
- Consistent thickness

ROOFS

RESISTO HIGH PERFORMANCE LASTOBOND PRO HT-N

UPC Code: 6 23680 10107 4

Product code	Dimensions	Thickness mil / mm	Approximate surface covered					
			per roll		per box		per pallet	
			ff ²	m ²	ff ²	m ²	ff ²	m ²
10107	36" x 65' 91 cm x 20 m	40 / 1.0	195	18	195	18	4,875	450

Units per box : 1

Boxes per pallet : 25

Weight (±) per pallet : 1,174 lbs / 533 Kg

RECOMMENDED USES

- Roof underlayment for edges and details
 - dormers
 - valleys
 - ridges
 - vents
 - skylights
 - etc.
- under all types of roof coverings
- Eaves protection on medium to high-slope roofs
- Edges of low slope roofs (single-ply system)

INSTALLATION CONDITIONS

- Minimum installation temperature 40 °F (4.5 °C)

REQUIRED PRODUCT



OR



PRINTED IN CANADA • A8050-032008

RESISTO
WATERPROOFING SOLUTIONS

CUSTOMER SERVICE
1 877 478.8408
www.resisto.ca