


# ASPHALTIC H<sub>2</sub>O FOUNDATION COATING

COATING

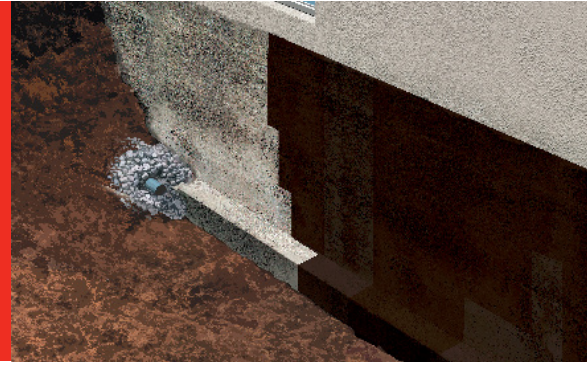

Bituminous emulsion non-fibrous water-based for the protection of exterior foundation walls, footings, retaining walls, wing walls, abutments and culverts. Its solvent-free composition is free of volatile organic compounds.

- Contains no VOC

## PRODUCT PURPOSE

Application	Dampproofing	
Building Part	Foundations	
Substrates	Concrete	Masonry block
	ICF foundations	

## PRODUCT CHARACTERISTICS

Installation Method	Paint brush	Roller
	Sprayer	
Service temperature	Up to 90 ° C (194 ° F)	

## PACKAGING

Code	Containers	Indicative Covering	Quantity per pallet
53121	3.78 l (1 US gal)	1 l/m <sup>2</sup> (0.3 US gal/10 ft <sup>2</sup> )	150
53120	18.9 l (5 US gal)		36




## PROPERTIES

Properties	ASPHALTIC H <sub>2</sub> O FOUNDATION COATING
Color	Black
Specific Gravity at 20 °C (68 °F)	1.01 kg/L (8.43 lbs/US gal)
Solids by weight	54%
Brookfield Viscosity at 25 °C (77 °F)	15 000 cP

(Valeurs nominales)

## ASPHALTIC H<sub>2</sub>O FOUNDATION COATING

### INSTALLATION

Storage	Store in a cool, dry place at temperatures above 5 °C (41 °F). Avoid freezing.		
Minimum Application Temperature	5 °C (41 °C)		
Complementary products	REGULAR PLASTIC CEMENT	<b>OR</b> PRO PLASTIC CEMENT	
	<b>OR</b> ULTRA PLASTIC CEMENT		
Tools Required	 Paint brush	 Roller	
	 Sprayer		
Surface preparation	The concrete must be clean, dry and free of dust, grease or other contaminants.		
Installation Prerequisite	It is recommended to seal the form ties with a plastic cement before applying ASPHALTIC H2O FOUNDATION COATING.		
Installation	Apply with a roller, a brush or sprayer to achieve a continuous film.		
Drying time	12 to 36 hours		
Cleaning	Clean wet tools with water. When the primer is dry, clean with solvents (mineral spirits, paint thinner, xylene, etc.).		
Tricks / Tips	Ensure that the ASPHALTIC H2O FOUNDATION COATING is dry to the touch before allowing backfilling. Use the foundation coating (version with solvent) for applications at temperatures below 5 °C (41 °F).		
Recommendations/ Limitations	It is not recommended to use a product containing bitumen directly on softwood boards or on flexible polyvinyl chloride. Protect product from water until completely dry.		
Warnings	Keep out of the reach of children. Properly close the container after each use. Do not empty into drains.		

