


# RESISTO

## MULTI-PURPOSE WATERPROOFING MEMBRANE

### FINISHING MEMBRANE

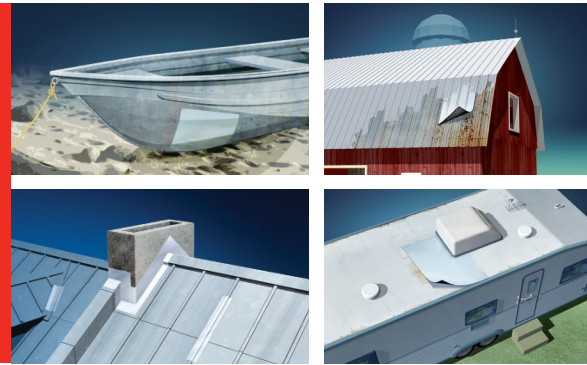

Self-adhesive membrane whose surface is protected by an HDPE aluminized complex. It is designed for waterproofing of various maintenance and repairs for home, cottage or farm.

- Durable
- UV resistant
- Excellent resistance to temperature variations

#### PRODUCT PURPOSE

Application	Waterproofing	
Building Part	Roofing	Other

#### PRODUCT CHARACTERISTICS

Technology	SBS modified bitumen
Surface	System HDPE, aluminum finish OR System HDPE, white finish
Underface	Silicone release film

#### PACKAGING

Code	Colour	Width		Length		Thickness		Net Area		Brute Area		Quantity (per pallet)
		cm	in	m	ft	mm	mils	m <sup>2</sup>	ft <sup>2</sup>	m <sup>2</sup>	ft <sup>2</sup>	
66574	Alu	10	4	5	16	1	40	0.50	5.3	0.50	5.3	864
66576		15	6	5	16	1	40	0.75	8.0	0.75	8.0	576
66579		23	9	5	16	1	40	1.15	12.3	1.15	12.3	360
66572		30	12	5	16	1	40	1.50	16.0	1.50	16.0	288
66578		46	18	5	16	1	40	2.30	24.8	2.30	24.8	180
66570		91	36	5	16	1	40	4.55	49.0	4.55	49.0	36
66524	White	10	4	5	16	1	40	0.50	5.3	0.50	5.3	864
66526		15	6	5	16	1	40	0.75	8.0	0.75	8.0	576
66529		23	9	5	16	1	40	1.15	12.3	1.15	12.3	360
66522		30	12	5	16	1	40	1.50	16.0	1.50	16.0	288
66528		46	18	5	16	1	40	2.30	24.8	2.30	24.8	180
66520		91	36	5	16	1	40	4.55	49.0	4.55	49.0	36





#### PROPERTIES

Properties	STANDARDS	MULTI-PURPOSE WATERPROOFING MEMBRANE
Tensile strength, MD/XD	ASTM D1970	Pass
Ultimate elongation, MD/XD	ASTM D1970	Pass
Cold bending at -30 °C (-22 °F)	ASTM D1970	No cracking
Peel resistance	ASTM D903	2890 N/m (16.5 lbf/in)
Tear resistance, MD/XD	ASTM D5601	33/30 N (7.4/6.7 lbf)

(All values are nominal)

## MULTI-PURPOSE WATERPROOFING MEMBRANE

### INSTALLATION

Storage	Rolls should be stored upright.		
Minimum Application Temperature	10 °C (50 °F)		
Complementary products	EXTERIOR PRIMER	<b>OR</b> H <sub>2</sub> O PRIMER	
	<b>OR</b> LOW VOC PRIMER	<b>AND</b> ALU ELASTOMERIC SEALER	
Tools Required	 Smoothing roller	 Knife	
	 Tape measure	 Roller	
Surface Preparation	The substrate must be clean, dry and free of dust, grease or other contaminants.		
Installation	<ol style="list-style-type: none"> <li>1. If required, apply EXTERIOR PRIMER or H<sub>2</sub>O PRIMER on the substrate.</li> <li>2. Apply the membrane on the substrate by peeling off the silicone film.</li> <li>3. Once installed, pressure must be applied over the whole area using a hard roller to ensure perfect adhesion.</li> </ol>		
Tricks / Tips	<p><b>POSSIBLE USES</b></p> <p>METAL SIDING AND ROOFING: house, farm building, factory, ventilation appliance, reservoir and trailer.</p> <p>METAL SURFACES: Gutter, boat, recreational vehicle and shed.</p> <p>OTHER: fireplace base, skylight, roof ridge, doors and windows and panels sealing.</p>		
Recommendations/Limitations	It is not recommended to use a product containing bitumen directly on softwood boards or flexible polyvinyl chloride. For installation over EPDM or TPO membrane, please contact the RESISTO technical service.		

