

## MINIMUM NOISE

Thanks to its high density, SOPRA-CELLULOSE has superior acoustic properties which increase noise absorption, and bring tranquility to the occupants of the house.

## WITHOUT HEALTH HAZARD

SOPRA-CELLULOSE does not contain asbestos, fibreglass or formaldehyde. It is certified for its low volatile organic compound (VOC) content. The product does not irritate the skin and provides superior resistance to corrosion, moisture and mould. Moreover, its flame-retardant properties help prevent the intrusion of insects, vermin and small rodents.

## MAXIMUM SAFETY

The laboratory test results of SOPRA-CELLULOSE, manufactured in accordance with CAN/ULC-S703, demonstrate its superior flame resistance (CAN/ULC-S102.2). In case of fire, cellulose will delay fire spreading in the building, which will give occupants several vital minutes to take shelter.



## INNOVATION SINCE 1908

SOPREMA has developed around the idea that the quality, durability and reliability of materials must match builders' ambitions and expectations. For more than 100 years, SOPREMA has been using its expertise to develop a variety of high-end products that meet or exceed all the requirements of the construction field.

ROOFS WALLS FOUNDATIONS PARKING DECKS BRIDGES ADDITIONAL



WATERPROOFING



INSULATION



VEGETATIVE SOLUTIONS



SOUNDPROOFING



ACCESSORY PRODUCTS

SOPREMA is an international manufacturer specializing in the production of waterproofing and insulation products, as well as vegetative and soundproofing solutions, for the building and civil engineering sectors.

## CUSTOMER SERVICE

### Professionals

SOPREMA.CA  
1.877.MAMMOUTH

### Residential

1.877.478.8408

BR348\_v.062018



INSULATION  
SOUNDPROOFING

# SOPRA-CELLULOSE

## COMFORT OPTIMIZED NOISE MINIMIZED

THERMAL AND ACOUSTICAL CELLULOSE INSULATION FOR INTERIOR AND EXTERIOR WALLS, ATTICS, FLOORS AND CEILINGS.



When selecting insulation material for your home, you need to consider costs, energy efficiency and environmental impact, but you must also think about the health, safety and quality of life of the occupants.


SOPRA-CELLULOSE, a thermal and acoustic insulation made up of 85% recycled newspapers and 15% flame-retardant minerals, is used for both new construction and renovations.

## OPTIMUM COMFORT

With an R-value of 3.7 per inch, SOPRA-CELLULOSE offers the highest thermal resistance of all traditional bulk insulation fibres on the market, allowing superior control of temperature and humidity.


## GREAT SAVINGS

Cellulose is one of the best choices in terms of value for money. Furthermore, its high-energy efficiency translates into potential annual savings on heating and cooling costs.

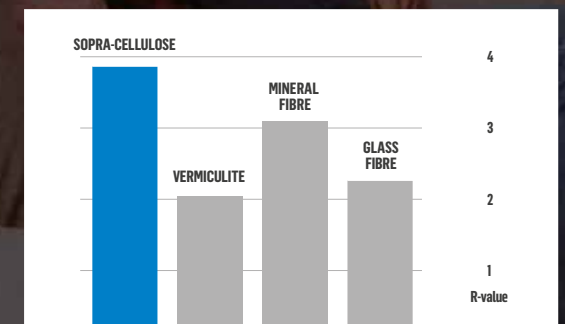

Comparative table of the "R" thermal resistance per inch of thickness of the most common blown insulation.

## VERSATILE AND EASY INSTALLATION

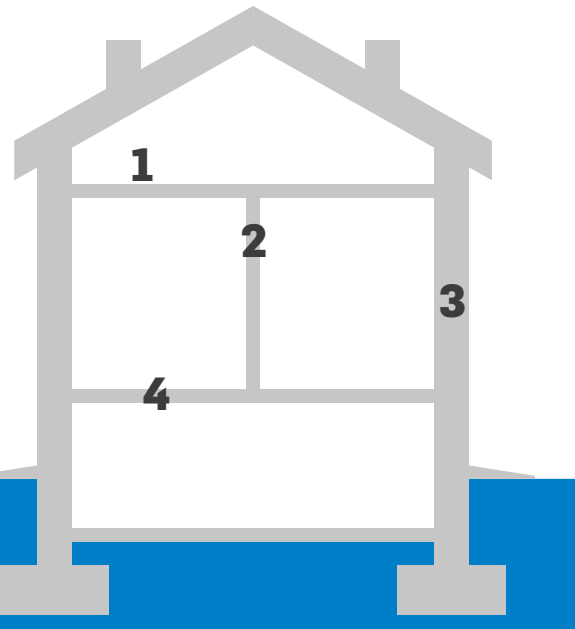

**1** Attic insulation



**2** Soundproofing of inside walls



**3** Insulation of outdoor walls




**4** Soundproofing of floors




The insulating material penetrates into the small interstices of the structure to form a homogeneous seamless cushion, thus limiting air infiltration and thermal bridges.

### BLOWN CELLULOSE INSULATION

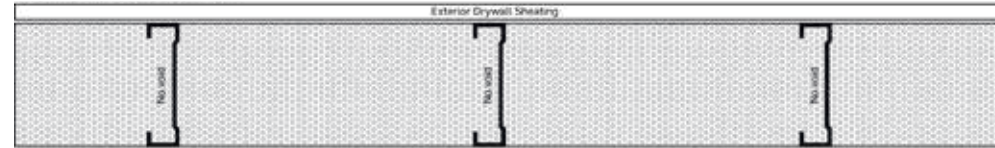

### TRADITIONAL BATT INSULATION

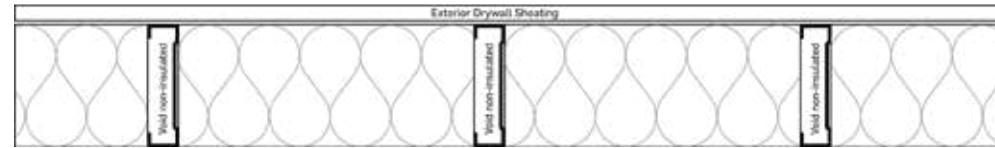

## COVERAGE SPECIFICATIONS – BLOWN APPLICATION

COVERAGE CHART (ATTIC) • Settled density 24.5 kg/m <sup>3</sup> (1.5 lb/ft <sup>3</sup> )											
THERMAL RESISTANCE		APPLIED THICKNESS		THICKNESS AFTER SETTLING		MASS PER UNIT AREA		COVERAGE PER BAG		MINIMUM BAGS PER UNIT AREA	
RSI	R	mm	in	mm	in	kg/m <sup>2</sup>	lb/ft <sup>2</sup>	m <sup>2</sup>	ft <sup>2</sup>	100 m <sup>2</sup>	1000 ft <sup>2</sup>
2.1	12	94	3.7	84	3.3	2.0	0.42	5.54	59.7	18.0	16.8
2.3	13	103	4.0	92	3.6	2.2	0.46	5.06	54.5	19.8	18.4
3.4	19	152	6.0	135	5.3	3.3	0.68	3.42	36.9	29.2	27.1
3.5	20	156	6.1	139	5.5	3.4	0.70	3.33	35.8	30.1	27.9
3.9	22	174	6.9	155	6.1	3.8	0.78	2.99	32.1	33.5	31.1
5.3	30	237	9.3	211	8.3	5.2	1.06	2.20	23.6	45.5	42.3
5.6	32	250	9.8	223	8.8	5.5	1.12	2.08	22.4	48.1	44.7
6.7	38	299	11.8	267	10.5	6.5	1.34	1.74	18.7	57.6	53.5
7.0	40	312	12.3	279	11.0	6.8	1.40	1.66	17.9	60.1	55.9
8.6	49	384	15.1	343	13.5	8.4	1.72	1.35	14.6	73.9	68.6
8.8	50	393	15.5	351	13.8	8.6	1.76	1.32	14.2	75.6	70.2
10.8	61	482	19.0	430	16.9	10.5	2.16	1.08	11.6	92.8	86.2

Settled density 24.5 kg/m<sup>3</sup> (1.5 lb/ft<sup>3</sup>). The R-value presented in this chart is measured after settlement, according to ASTM C518 standard and ASTM C687 conditioning method. This chart indicates the minimum number of bags to use. The final result will vary according to the application technique, the equipment and the hose used. From RSI-7.0 or R-40, it may be necessary to make an adjustment according to the application technique. For the most up-to-date information, please refer to our website at [www.soprema.ca](http://www.soprema.ca) or your SOPREMA representative.

### INSTALLATION CHART (WALL)

STRUCTURE	STRUCTURE DIMENSION		THERMAL RESISTANCE		MASS PER UNIT AREA		COVERAGE PER BAG	
	mm	in	RSI	R	kg/m <sup>2</sup>	lb/ft <sup>2</sup>	m <sup>2</sup>	ft <sup>2</sup>
WOOD	38 × 89*	2 × 4*	2.6	14.8	5.13	1.05	2.21	23.8
	38 × 140*	2 × 6*	3.9	22.2	7.70	1.58	1.48	15.9
	38 × 184**	2 × 8**	5.1	28.7	11.35	2.33	1.00	10.8
METAL	38 × 101*	2 × 4*	2.9	16.7	6.41	1.31	1.77	19.1
	38 × 152*	2 × 6*	4.2	24.1	9.26	1.90	1.23	13.2
	38 × 203**	2 × 8**	5.6	31.5	13.87	2.83	0.82	8.8

\* Minimum installed density of 56 kg/m<sup>3</sup> (3.5 lb/ft<sup>3</sup>) for walls with structures of 38 mm × 150 mm (2 × 6 inches) and less. \*\* Minimum installed density of 64 kg/m<sup>3</sup> (4 lb/ft<sup>3</sup>) for walls with structures greater than 38 mm × 150 mm (2 × 6 inches). This chart indicates the minimum number of bags to use. The final result will vary according to the application technique, the equipment and the hose used. For the most up-to-date information, please refer to our website at [www.soprema.ca](http://www.soprema.ca) or your SOPREMA representative.



## ENVIRONMENTALLY FRIENDLY

SOPRA-CELLULOSE's composition—based on 100 % recycled fibres and an ecofriendly manufacturing process—contributes to meeting LEED program requirements as well as the standards of other green-building programs that provide entitlement to tax credits.

